

JUMP STARTER

BOOSTER

GK1201




1000A

PEAK CURRENT

12V

MULTI-FUNCTIONAL JUMP STARTER

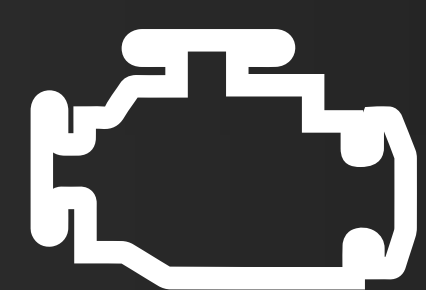

5.0L GASOLINE & 3.0L DIESEL

Designed for gas engines up to 5.0 liters and diesel engines up to 3.5 liters for small diesel cars, SUVs, boats, trucks, ATVs, motorcycles and more.



POWER BANK

This product has 3 output ports for multiple charging demands. Such as cellphone, tablet iPad, laptop, PSP, gamepad, car vacuum cleaner (with the provided cigarette lighter converter) and more.



SAFETY JUMP-START CLAMP


Multiple safe protection design

1. Reverse Connection Protection
2. Low Battery Protection
3. High Temperature Protection



LED FLASHLIGHT

Long press the power button for 3 seconds to turn on turn off the flashlight.
Quick press the power button to switch 3 flashlight modes.

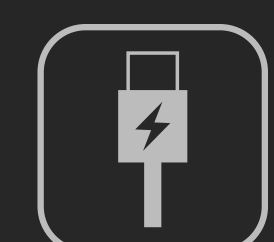

USB Charger



Smart Phone



Tablet



Laptop



Car



Truck



Motorcycle



Boat



Lighting



SOS



Strobe light











RECHARGE TIME	
10W	4.68H
18W	2.6H

TECHNICAL SPECIFICATIONS	
INTERNAL BATTERY TYPE	LITHIUM ION
PEAK CURRENT	1000A
STARTING CURRENT	500A
BATTERY CAPACITY	10000AMH(37WH)
OPERATING TEMPRATURE	"-4°F TO +140°F (-20°C TO +60°C)"
CHARGING TEMPRATURE	"32°F TO +122°F (0°C TO +50°C)"
USB-C PROTOCOL	QC3.0
USB-C (INPUT)	5.0V/3A & 9V/2A & 12V/1.5A
USB-A PROTOCOL	QC3.0
USB-A1(OUT)	5V(5.0V/2.4A)
WEIGHT	2.95 LBS (1.34 KG)
LED FLASHLIGHT	80 LUMEN
PRODUCT DIMENSIONS	L192.1 X W89.0 X H39.1 MM

WHAT'S IN THE BOX

GK-J1201 JUMP STARTER

- STORAGE BAG X1
- PRODUCT X1
- CHARGING CABLE X1
- USER MANUAL X1
- EC5 JUMPER CABLE X1

- 
Over Charge Protection
- 
Over Current Protection
- 
Short Circuit Protection
- 
Reverse Polarity Protection
- 
Low Temp Protection
- 
High Temp Protection
- 
Over Voltage Protection
- 
Over Load Protection
- 
Reverse Charge Protection
- 
Spark Proof Protection